


SECTION A-A

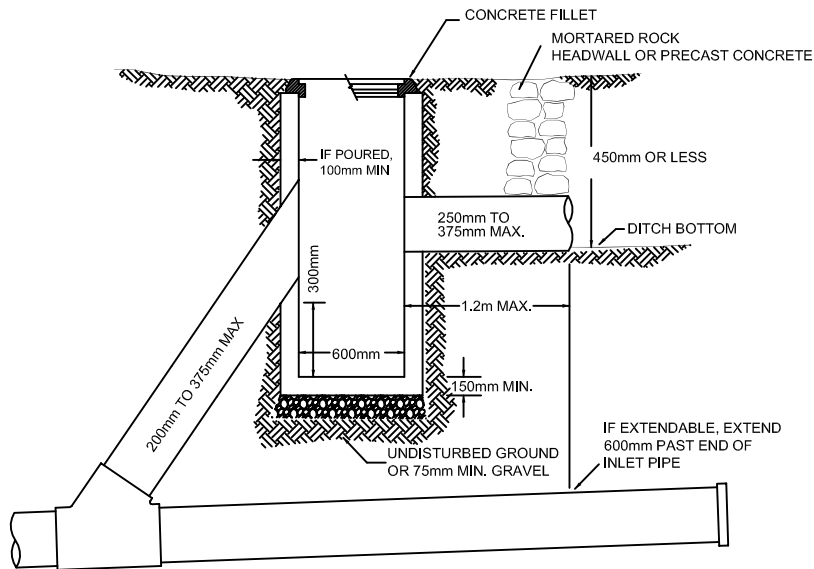

CONNECTION TO DEEP MAIN

NOTE:

1. A 1.2m VERTICAL LENGTH OF 600mm CLASS 3 R.C. AS PER CURRENT ASTM C 76 SPECIFICATIONS SET ON END IS ACCEPTABLE IN LIEU OF MIN.100mm THICKNESS OF POURED CONCRETE AS SHOWN.
2. FOR PIPES LARGER THAN 375mm, SPECIALLY DESIGNED SILT TRAPS WITH OVERSIZED BARRELS WILL BE REQUIRED.
3. LID TO BE SET BELOW SURROUNDING GRADE.

Silt Trap

Revision Date:
October 2003

Drawing Number:
S18SS