TREE PROTECTION FENCING

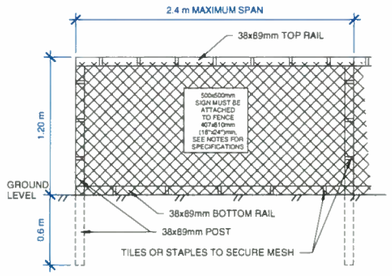

TREE PROTECTION FENCING SPECIFICATIONS:

1. THE FENCE WILL BE CONSTRUCTED USING 38x89 mm (2"x4") WOOD FRAME:
   - TOP, BOTTOM AND POSTS. *
   - USE ORANGE SNOW FENCING MESH AND SECURE TO THE WOOD FRAME WITH ZIP TIES OR GALVANIZED STAPLES.
2. ATTACH A SIGN WITH MINIMUM SIZE OF 407mm x 610mm (18"x24") WITH THE FOLLOWING WORDING:
   a) **DO NOT ENTER** - TREE PROTECTION ZONE (FOR RETAINED TREES) OR
   b) **DO NOT ENTER** - FUTURE TREE PLANTING ZONE (FOR TREE PLANTING SITES)

THIS SIGN MUST BE AFFIXED ON EVERY FENCE FACE OR AT LEAST EVERY 10 LINEAR METRES.
* IN ROCKY AREAS, METAL POSTS (T-BAR OR REBAR) DRILLED INTO ROCK WILL BE ACCEPTED

LEGEND

- LAWN GRASS
- PAVERS
- ASPHALT DRIVEWAY
- ROCKWALL
- TREE
- TREE TO BE REMOVED
- TREE PROTECTION FENCING

NEW TREES:

- QG - 17 x Garry Oak (Quercus garryana)
- FC - 1 x Fig (Ficus carica)
- MG - 2 x Evergreen Magnolia (Magnolia grandiflora)
- CV - 3 x Venus Dogwood (Cornus x 'Venus')
- AP - 3 x Japanese Maple (Acer palmatum/Acer japonicum/Acer shirasawanum)
- SB - 1 x Sevice Berry
- AA - 1 x Arbutus xandrachnoides, Arbutus marina or Arbutus unedo

LANDSCAPE PLAN

1 : 150

ASPIRE CUSTOM DESIGNS

Copyright reserved.
This plan and design is and remains at all times the exclusive property of Aspire Custom Designs Ltd. and cannot be used in whole or in part without the administrators written consent. These drawings are not to be scaled off. The client must confirm all building material sizes before ordering or purchasing. Any discrepancies noted on this drawing must be reported to Aspire Custom Designs Ltd. immediately. Aspire Custom Designs reserves the right to recall drawings from any local municipality, city or jurisdiction.

No.	Date	Appr.	Revision Notes
A	22-02-01	Permit set	

No.	Date	Issue notes

Aspire Custom Designs
1145 Bute Street
Victoria BC Canada V8Z 1L9
Lindsay J Baker 250-415-1856

JUDGE PLACE
NEW HOUSE

LANDSCAPE PLAN

Drawn by: L. Baker	Project #: 2020-11
Checked by: L. Baker	Scale: 1/4" = 1'0" or as noted
Date: Feb 01, 2022	Sheet: A1.4

RECEIVED
FEB 03 2022
PLANNING DEPT.
DISTRICT OF SAANICH