SHELBOURNE STREET IMPROVEMENTS PROJECT (SSIP-P3)
PHASE 3 - UNDERGROUND UTILITIES AND TRANSPORTATION CONCEPT*
June 2024

North

Surface-works Legend

- New Asphalt
- Concrete
- Landscaping / Grass
- Exposed Aggregate
- Separated Cycle Track (Asphalt)
- Possible new tree planting (13 trees on Shelbourne St; 33 trees on Pear St)
- Existing tree likely to be removed (8 trees on Shelbourne St; 4 trees on Pear St)
- Traffic signal

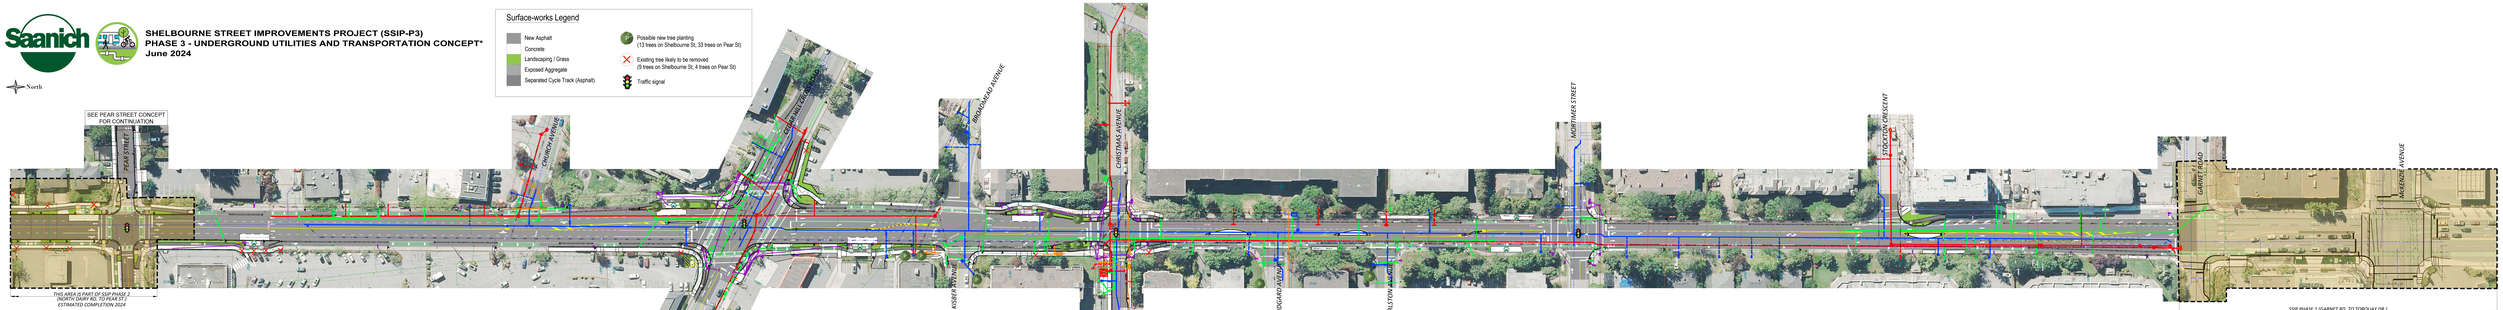

Utilities Legend

- New Sanitary Sewer Main (880m)
- New Sanitary Force Main (545m)
- New Sanitary Sewer Service
- Sanitary Sewer Lift Station (Replacement)
- New Storm Sewer Main (950m)
- New Storm Sewer Service
- New Water Main (1350m)
- New Water Service
  Irrigation lines not shown for clarity
- New BC Hydro or Telus Ducts and Equipment
- New Traffic Signal and Lighting Conduits and Equipment
- Existing Sanitary Sewer Main
- Existing Sanitary Force Main
- Existing Storm Sewer Main
- Existing Water Main
- Utility Main to be Abandoned

Modular concrete bike lane barrier with flexible delineators (typical).

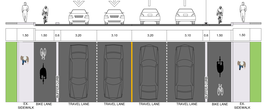
1.50
1.00
0.4
3.00
3.10
3.00
3.10
0.4
1.00
1.50
CURB
CURB
CURB